



Extend your Lifestyle®

Olympus® Awning

create the outdoor room

The Olympus is a compact, fully enclosed cassette folding arm awning being only 120mm high and 204mm deep when retracted. This contemporary elliptical design is ideal for residential applications such as a small terrace courtyard or apartment block balcony.

The Olympus can be customised to sizes up to 5m wide and 3m in projection and is available as a wall mount or ceiling mount installation using extruded aluminium end fixing plates.

The Olympus cassette is available in 8 standard colours, as well as a range of 140 colours to customise the frame and fascia. The fabric is fully protected by the enclosed cassette when retracted, giving optimal protection for the fabric and operating mechanism against dirt, rain and humidity.

The Olympus can be operated manually by a crank handle, or can be motorised with optional sun, wind and timer systems.

Aluxor Awnings is a leading manufacturer of German precision-engineered awnings, operating in Australia for over 40 years. Aluxor awnings are built to last.



All operating components are designed and manufactured in Germany and certified by international testing agency TÜV to the European standard 'CE Marking'.

The Secuflex 50 folding arms use tensioned, spring loaded, PVC coated twin steel cables that provide added protection against corrosion. These cables are individually hung to provide excellent wind stability and fabric tension.

The Secuflex 50 twin cable arms are able to withstand 120,000 cycles of stress, as certified by Materials Testing Authority of Germany.


Patented pivot ball front bar connector provides the best possible operational safety.

Extruded aluminium profiles provide solid, stable and long lasting quality that will not rust or vibrate in harsh conditions.


Construction hardware is made of marine grade 316 stainless steel.

The fully enclosed cassette provides optimal protection for the fabric and operating mechanism when retracted.

Patented aluminium brackets and components with pretreated powdercoat finish.



Oversquare

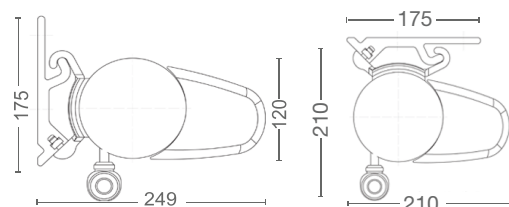

Wall Installation

Celing Installation

Specifications

<i>Dimensions mm (h x d)</i>	✓ 120 x 204
<i>Width single unit</i>	✓ 2m – 5m
<i>Projection range</i>	✓ 1.5m - 3m
<i>Pitch range</i>	✓ Up to 35°
<i>Mounting brackets</i>	✓ End fixings only
<i>Standard frame</i>	✓ 8 standard colours
<i>Extruded aluminum cassette</i>	A 140 powdercoat colours
<i>Fabric</i>	✓ Acrylic canvas
<i>Fabric</i>	A PVC plastisol coated
<i>Operating mechanism</i>	✓ Manual
<i>Automation features</i>	A Remote operated motor
<i>Automation sensors</i>	A Motion, sun and wind

✓: Standard A: Available

*Designs and specifications may change without notice.

Standard Powdercoat Colours

	White Satin		Woodland Grey Satin
	Silver Matt		Monument Satin
	Cream Satin		Black Satin
	Riversand Matt		Sable Bass (Textured)



*Conditions apply

Aluxor Awning Systems
Aluxor Industries Pty Ltd
www.aluxor.com.au

ALUXOR |||||
AWNING SYSTEMS